

SF-400


Semi Automated Coagulation Analyzer



Features

- Clotting (Mechanical viscosity based);
- No interference from interns, hemolysis, chills and turbid particles;
- 4 independent test channels with random and parallel tests.
- Original reagents, Control plasma, Calibrator plasma;
- Support PT, APTT, Fbg, TT, Factors, Protein C/S, etc.



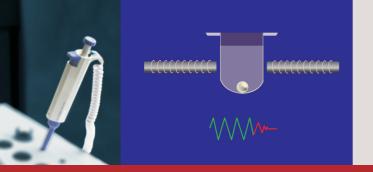

Specification

Testing Principle Clotting (Mechanical viscosity based);

Testing Method Inductive dual magnetic circuit method. Signal from eddy current sensor.

Testing Items Support PT, APTT, Fbg, TT, Factors, Protein C/S, etc.

Incubation channels 16

Reagent Positions 4.

Stirring Positions 1.

Display LCD with adjustable brightness.

Build-in Printer Thermal printer, with function of batch printing by ordinal.

Port RS232, LIS/HIS supported.

Data Transmission HIS/LIS supported

Testing Operation Automatically or manually, pipette compatible.

Incubation Time 0~999s.

Incubation Timing 4 individual timers, with counting down display and alarm.

Power Supply AC100V~250V, 50/60HZ.

ISO





ISO9001:2000+ISO13485:2003

No.Q1N 11 02 76148 001

